


Werner Floors®

Hamburg

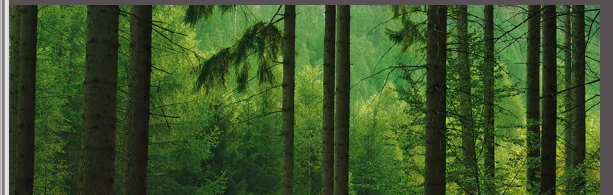


Werner Floors® Customized-Line

Exclusive custom-made floors



www.durafloor-werner.de

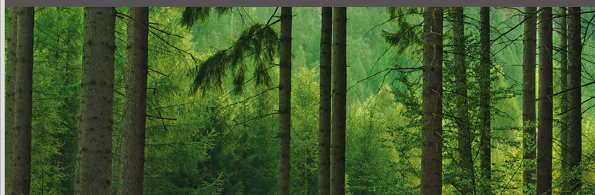

Werner Floors® parquet ♦ Customized-Line

During the last years and by increasing international cooperation with architects and interior designers, Werner Floors® developed in the field of special surfaces and custom made products. With the products from our Customized Line all extraordinary requirements and demands can be satisfied.

Special installation patterns and designs like Chevron/French herringbone, rhombs, hexagons, parquet panels, any dimensions and parquet of all kinds of wood can be produced on request. Our aim is to fulfill all wishes of the builders, interior designers and architects to the full extent regarding the shape and the surface refinement of our parquet in an outstanding level.

The results of our dynamic increasing cooperation can be seen in exclusive and prestigious projects worldwide. Recent projects with custom made products by Werner Floors® are located for example in New York, Shenzhen, Beijing, Manila, Dubai, Mexico City and of course in different cities in Germany and Europe. Alongside homebuilding companies and private investors, we work for wellknown companies like Ritz Carlton, Conrad Hotels, Bulgari, Hilton, Raffles Hotels, etc.



All parquet floors shown here are just examples, they are only an extract of our full customized line and opportunities we offer. Do not hesitate telling us your desires and requirements.



A floor matching my taste

When looking for the perfect floor, several factors need to be taken into account. Besides choosing the wood type and surface treatment, the dimensions and the design of the parquet elements are also a very important point. Additionally, the different construction types need to be considered to fulfill all technical requirements (for example underfloor heating, total thickness of the floor, subfloor conditions etc). Of course we are ready to give you all needed technical support and advice.

Due to our own production facility and our close cooperation with construction companies, architects and designers worldwide, we were able to create various parquet types and surface treatments, to give you the possibility to make your floor even more unique and individual. We are your professional partner, with the required know-how, for creating a special parquet floor for your building project.

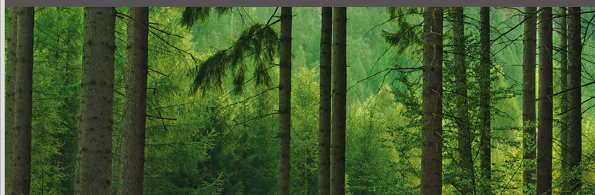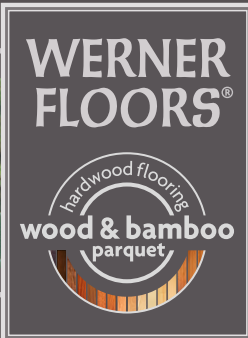

Natural Effect Varnish

The special feature of this varnish is its super matte effect which gives the floor a very natural look. The gloss level is especially regulated so that the floor looks and feels similar to a natural oiled, super matte parquet surface without losing the advantages of a varnished surface, such as the fast and easy cleaning.

Natural oiled

Natural oil gives flooring an open-pored protection. This type of treatment creates a matte, very natural looking surface, whereby the structure of the wood is emphasized. However, an oiled floor requires more care than sealed surfaces. Apart from regular cleaning, it should also be treated with our oil at least once a year. However, treatment intervals depend greatly on how much wear and tear the floor is exposed to and may be significantly shorter. Nevertheless, repairing a scratched, oiled parquet floor is much easier than repairing one with a varnished surface.

7pro UV-varnish

Our 7-Pro UV-varnish is a highly resistant protective system for parquet floorings, which have to endure all kinds of wear and tear. This highly protective system is applied in seven layers. The 7pro UV-varnish flooring is easy to care for – dirt cannot penetrate the wood and can therefore be easily removed. For high traffic areas a 9 layer special treatment can be applied to an outstanding durability (9pro UV-varnished).

Special structure finishings

All following surface treatments are varnished or oiled at the end and can be stained, if wished.

Brushed


The untreated parquet surface is brushed lengthwise to its texture with a special brush. The soft wood components between the grains are removed by this procedure whereas the rest of the board keeps basically the same. That way the special wood structure is emphasized and a natural surface feel is produced.

Handscrapped

This wavy planed parquet surface sets an additional accent to the natural wood grain.

Rough Sawn

This kind of surface is characterised by its sawn structure transverse to the grain. With this treatment a particular connection of natural and industrial charm is established.

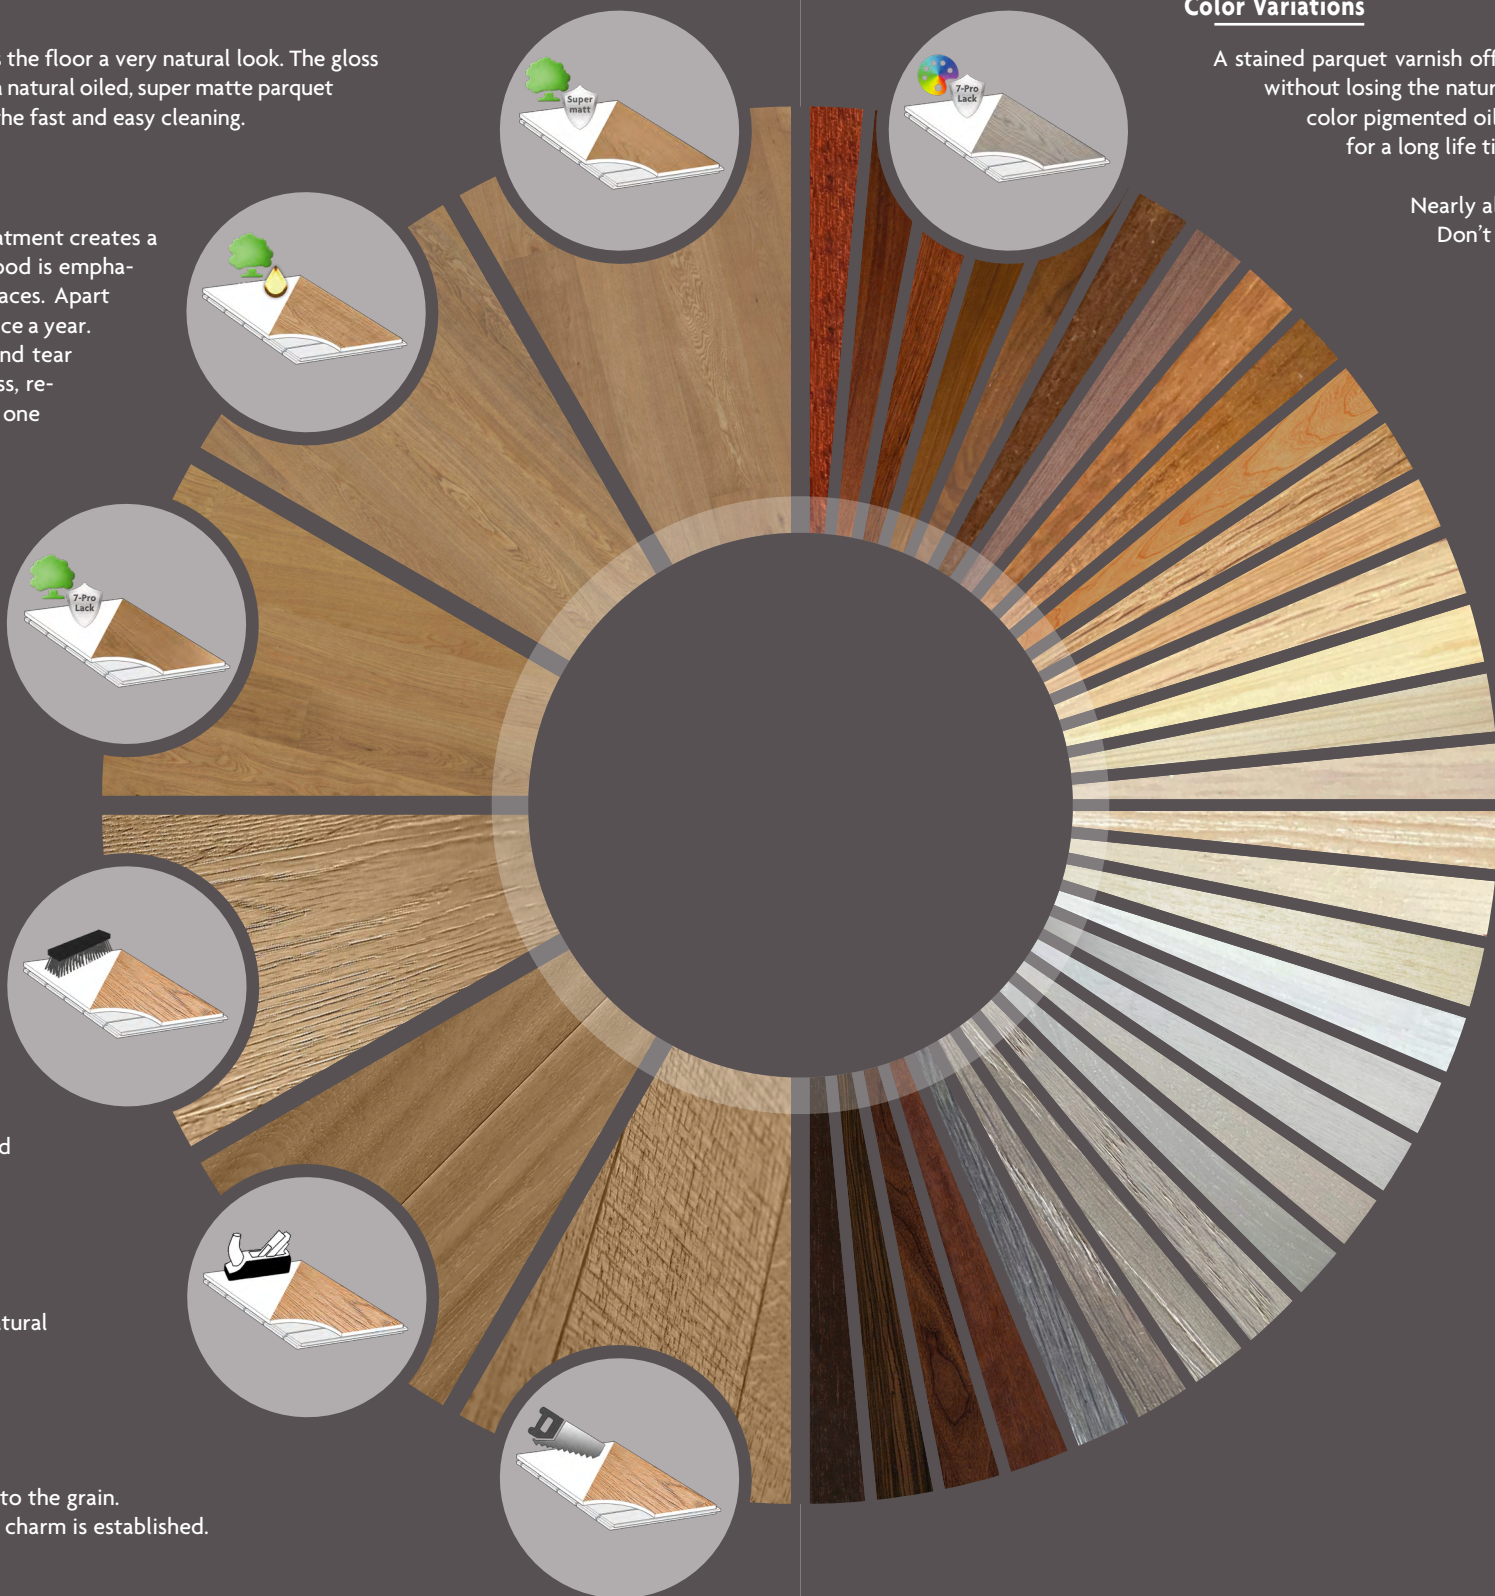

Color Variations

A stained parquet varnish offers an individual shade of color that helps to realize your personal design wish without losing the natural beauty of the wood itself. A very similar effect can be produced by applying a color pigmented oil. These high abrasion-proof varnishes and high tech oils have a protective effect for a long life time of your floor.

Nearly all thinkable color shades and surface treatments are possible.
Don't hesitate to contact us.

Brushed and Washed


This procedure is a combination of a brushed and a colored surface treatment. The wood structure is emphasized by brushing and coloring the deeper parts of the wood with tinted varnish or oil. This effect gives your parquet flooring a unique look that emphasizes the individual texture of each element.



Brushed
(monochrome
or transparent)












Washed
(indentions colored
or two-tone)

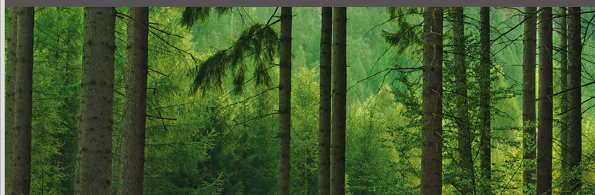

INSPIRATIONS FOR SURFACE TREATMENTS

INSPIRATIONS FOR SURFACE TREATMENTS

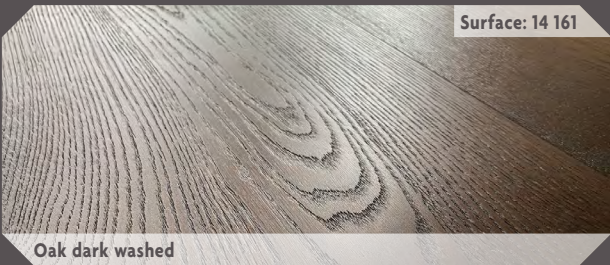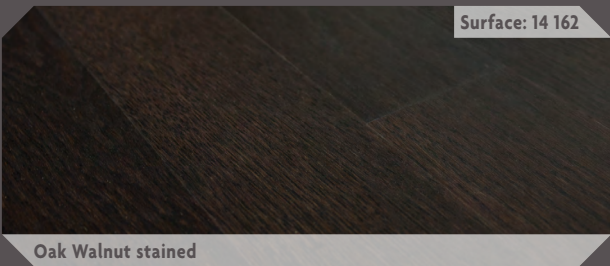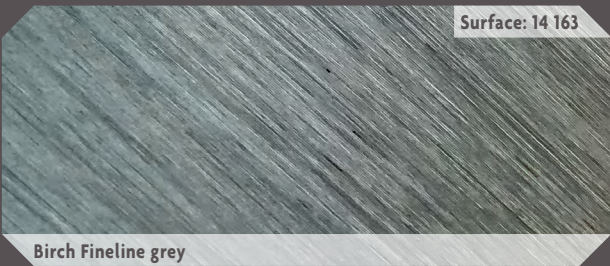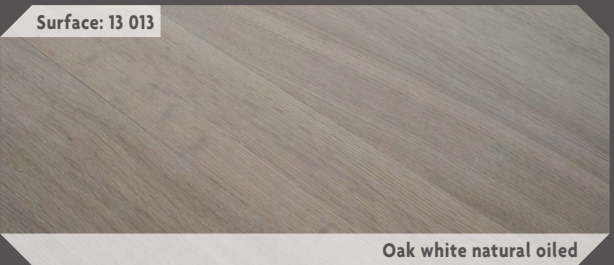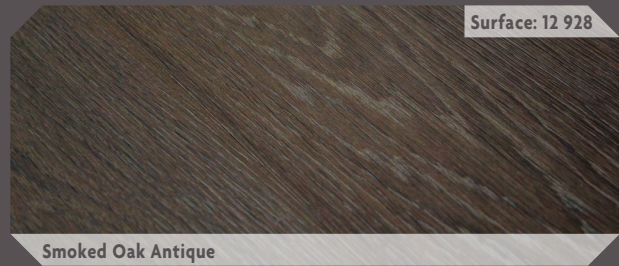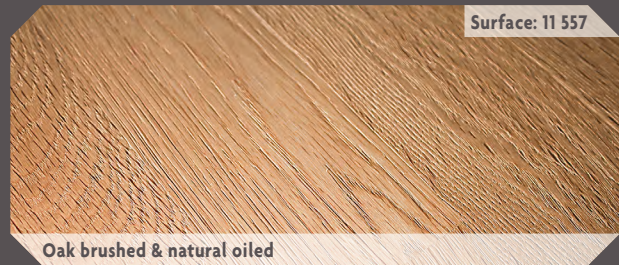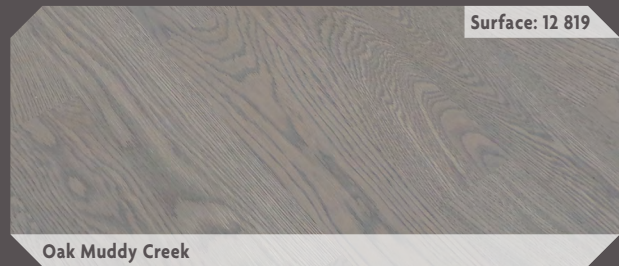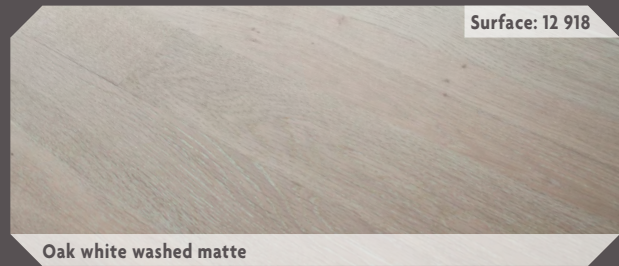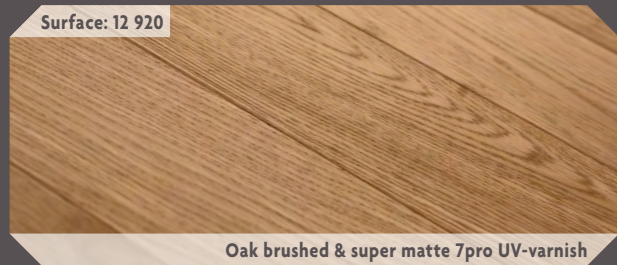



DIMENSIONS, DESIGNS & PATTERNS

STANDARD PATTERNS

Construction: 2-layer,- 3-layer,- multilayer- and solid parquet

Parquet elements

Our single tile parquet with its various dimensions of the single elements is perfectly suitable for installation in the shown installation patterns.

Dimensions
Length: 340-1200 mm
Width: 60-120 mm
Thickness: 9-22 mm
Usable layer: 2 | 2.5 | 3 | 4 | 5.5 | 6 mm

Long planks

As a typical parquet element our Werner Floors® long plank parquet will provide every interior with an authentic and homelike atmosphere. This plank can be combined with nearly all kinds of interior designs.

Dimensions
Length: 900-2400 mm
Width: 150-220, 240-320 mm
Thickness: 12-24 mm
Usable layer: 2 | 2.5 | 3 | 4 | 5.5 | 6 mm

Construction types

Other custom made products / dimensions on request.

INSTALLATION DESIGNS



SPECIAL PATTERNS

Construction: multilayer

Chevron

To achieve the exclusive charm of this historical looking chevron pattern, the ends of the parquet tiles are cut in a 45° or 60° angle (other angles on request).

Dimensions
Length: 750 | 780 | 810 | 410 | 830 | 430 mm
Width: 150 | 120 | 90 | 90 | 70 | 70 mm
Thickness: 10-22 mm
Usable layer: 2 | 2.5 | 3 | 4 | 5.5 | 6 mm



Panel parquet

Panel parquet is produced as finished flooring elements to realize specific patterns and designs. With this kind of flooring, there are nearly no limits set to creativity.

Dimensions
Length: 500 mm
Width: 500 mm
Thickness: 14-22 mm
Usable layer: 2 | 2.5 mm



Rhombs

Rhomb parquet is a traditional pattern that recently has a renaissance in the exclusive residential and hotel sectors. Due to the arrangement of the individual elements, it produces an interesting three dimensional cube effect. Through incidence of light in connection with the reflection of the differently arranged individual elements, the flooring has a very precious appearance.

Dimensions
Width: 120, 150 mm
Thickness: 14-22 mm
Usable layer: 2 | 2.5 | 3 | 4 mm



Hexagons

This extraordinary floor is created by combining hexagon elements, which lead to a very exclusive and outstanding atmosphere in any room.

Dimensions
Width: 240 oder 190 mm
Thickness: 14-22 mm
Usable layer: 2 | 2.5 | 3 | 4 mm



Hexagon-Chevron Design Parquet

The interplay of Chevron (French herringbone) pieces and hexagons provides an exciting, interwoven overall picture of the flooring. The wood structure underlines additionally the unobtrusive vitality of this pattern.


Dimensions
Width: 120 mm (chevron)
240 mm (hexagons)
Thickness: 14-22 mm
Usable layer: 2 | 2.5 | 3 | 4 mm



Hexagon plait pattern 90°


The interplay of straight/chevron tiles and hexagons leads to a stunning interwoven overall appearance. In contrast to the hexagon-chevron pattern, in this pattern the tiles are cut in a 90° angle at one end to achieve an even more special room atmosphere.

Dimensions
Width: 120 mm (chevron)
240 mm (hexagons)
Thickness: 14-22 mm
Usable layer: 2 | 2.5 | 3 | 4 mm

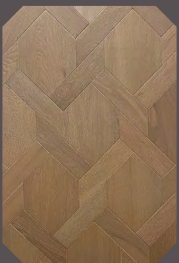

Construction types

Other custom made products / dimensions on request.

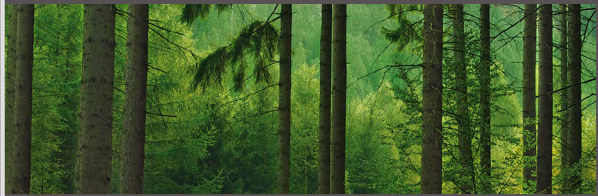

APPEARANCE OF OUR GRADINGS

S-Natura (AB +)

- Only slight color differences
- Small knots allowed
- Almost without sapwood



Natura (AB)

- Slight to medium color differences
- Small to medium knots allowed
- Sapwood: little



Hanseat (ABC)

- Medium color differences
- Medium knots allowed
- Sapwood: little



Rustic (BCD)

- Medium to stronger color differences
- Big knots allowed
- Sapwood: visible



Long plank Natura (AB)

- Only slight color differences
- Small knots allowed
- Sapwood: little



Long plank Rustic (BCD)


- Medium to stronger color differences
- Big patched knots allowed
- Almost without sapwood




WOOD TYPES




Maple



American Walnut

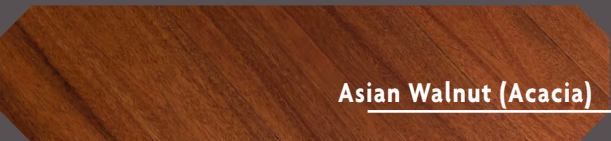


Asian Walnut (Acacia)




Bamboo Classic



Bamboo Natural light



Strand Bamboo



Cabreuva



Cumaru




Doussie



Oak




Ash

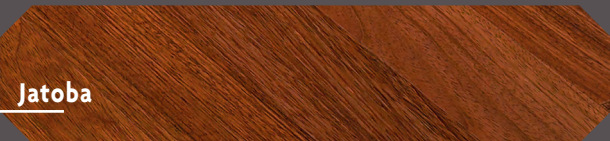


Jatoba




Cherry




Merbau




Smoked Oak




Teak

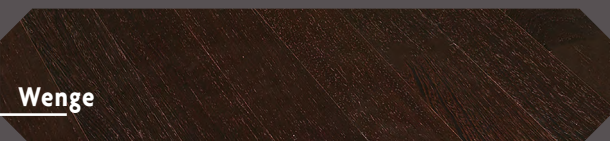

Wenge



Zebrano

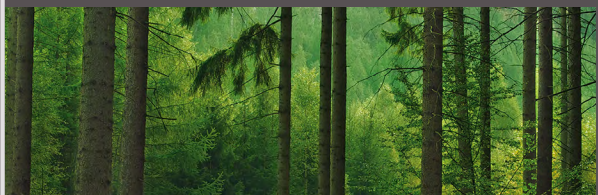


OAK LONG PLANKS



Oak AB brushed & natural oiled


As a classical parquet element our Werner Floors® long plank parquet will provide every interior with an authentic and homelike atmosphere. This plank can be combined with all kinds of interior designs.

With its lengths of 1900mm and its width of 190mm the long plank parquet creates a natural and warm ambience. The plank appearance in combination with the advantages of an 2-layer or multilayer engineered parquet and is therefore perfectly suitable for the installation on under-floor heating.

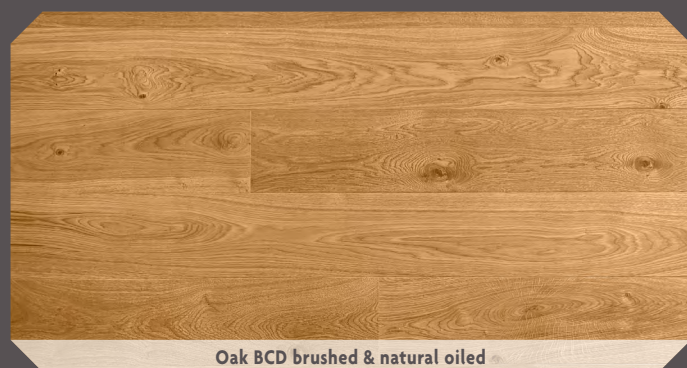

Oak BCD brushed & natural oiled

OAK LONG PLANKS

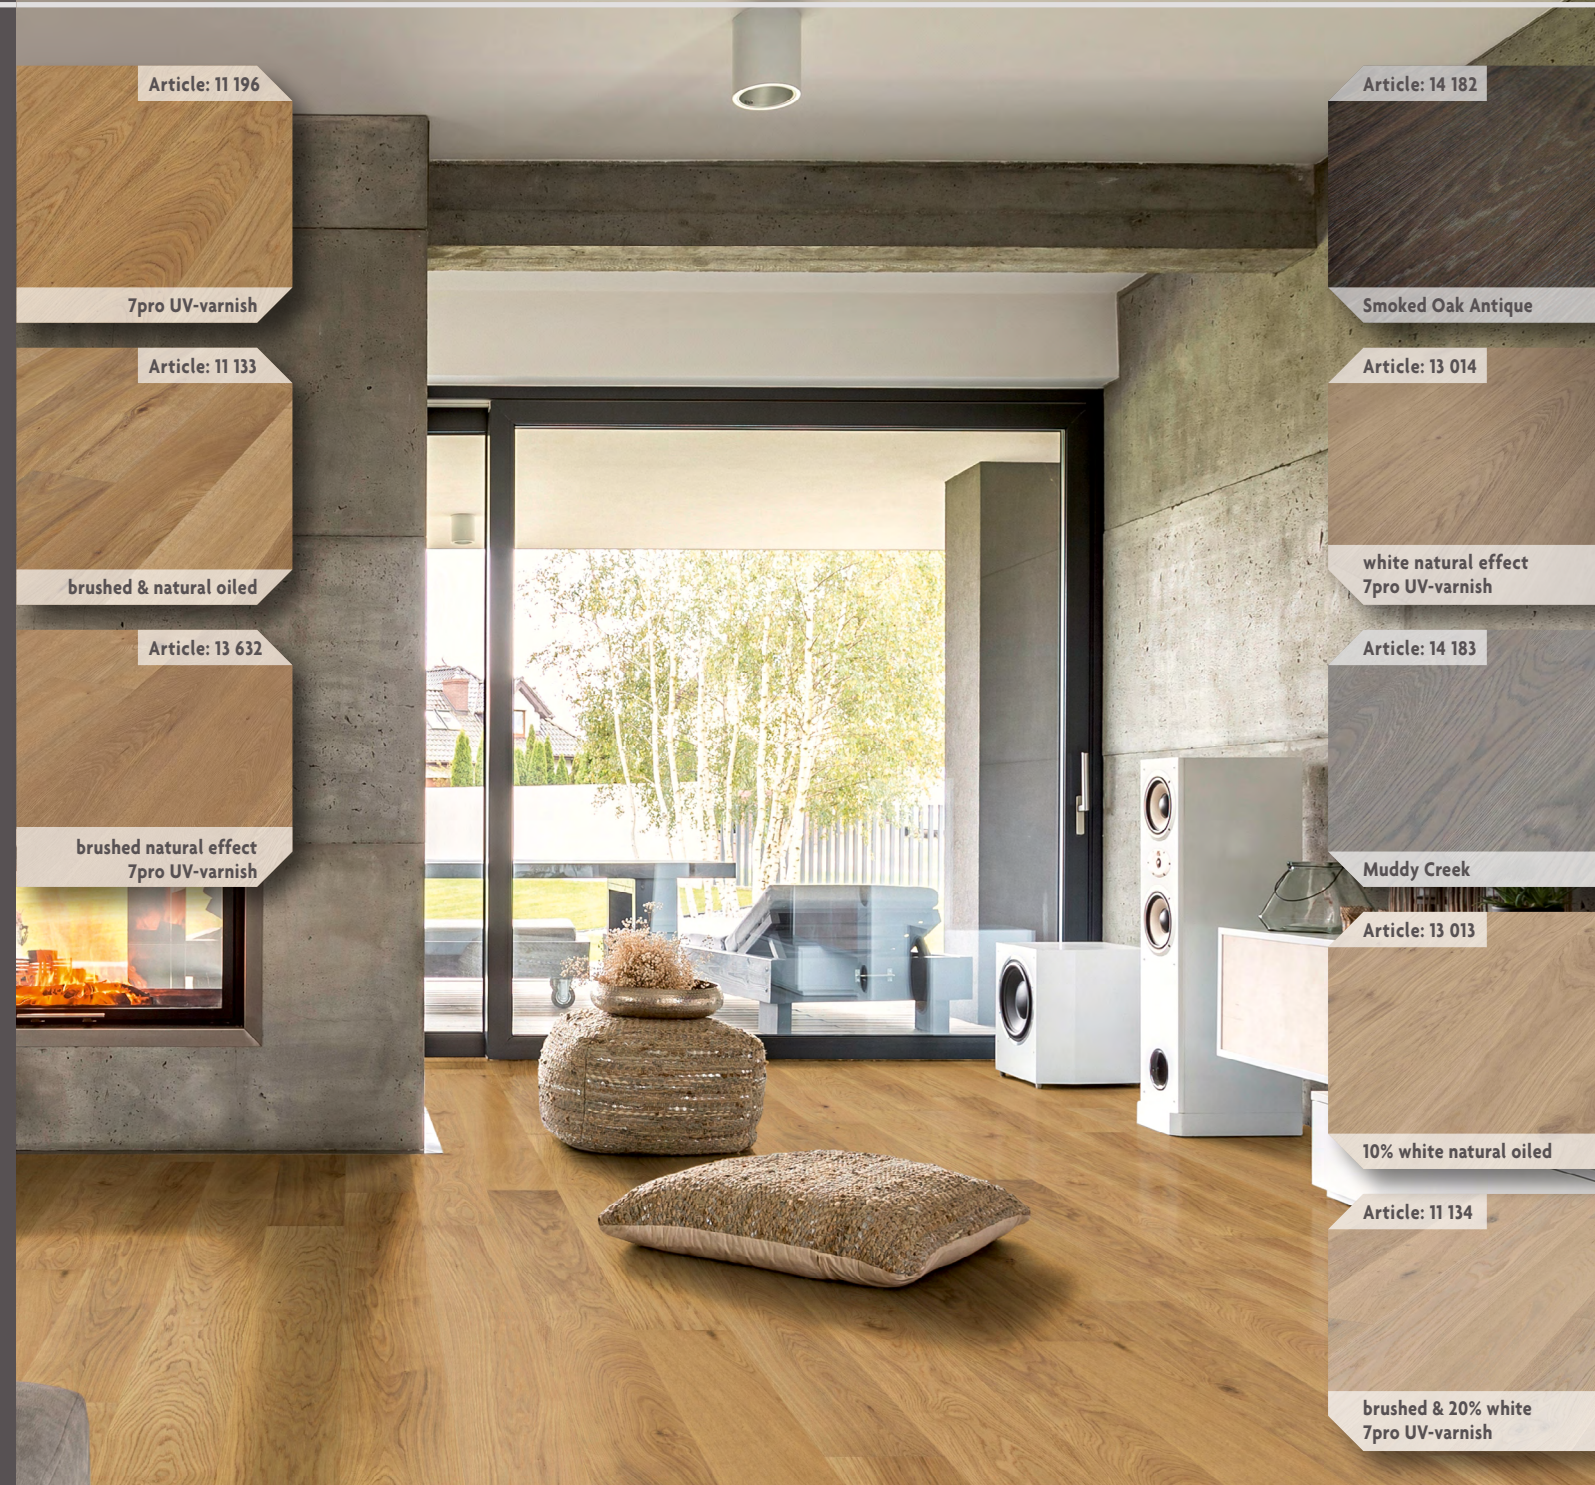

Article: 11 196

7pro UV-varnish

Article: 11 133

brushed & natural oiled

Article: 13 632

brushed natural effect
7pro UV-varnish

Article: 14 182

Smoked Oak Antique

Article: 13 014

white natural effect
7pro UV-varnish

Article: 14 183

Muddy Creek

Article: 13 013

10% white natural oiled

Article: 11 134

brushed & 20% white
7pro UV-varnish

Technical data

Construction type	2-layer or multilayer engineered parquet
Humidity on delivery	about 7%-9%
Bottom layer	spruce/pine or multiply birch
Installation	glued down, floating or nailed down (see data sheet)

Dimensions in mm*	Length: 900-2400
	Width: 150-220, 240-320
	Thickness: 12-24
Usable layer	2 2.5 3 4 5.5 6 mm

Special custom made products on request (about 8-10 weeks delivery time after order)

Other dimensions | other surface treatments (see page 4-7) | other thickness of usable layer | change of bottom layer | other construction types

*up to 3-5% other lengths allowed

ASH LONG PLANK

Article: 20 200

Grey & White Washed
7pro UV-varnish

Article: 14 130

natural oiled

Article: 14 129

White Washed
7pro UV-varnish

WALNUT LONG PLANK

Article: 14 132

7pro UV-varnish

Article: 14 134

open-pored

Article: 14 133

20% white 7pro UV-varnish

Technical data

Construction type 2-layer or multilayer engineered parquet
Humidity on delivery about 7%-9%
Bottom layer spruce/pine or multiply birch
Installation glued down, floating or nailed down (see data sheet)

Dimensions in mm* Length: 900-2400
Width: 150-220, 240-320
Thickness: 12-24
Usable layer 2 | 2.5 | 3 | 4 | 5.5 | 6 mm


Special custom made products on request (about 8-10 weeks delivery time after order)
Other dimensions | other surface treatments (see page 4-7) | other thickness of usable layer | change of bottom layer | other construction types
*up to 3-5% other lengths allowed

Technical data

Construction type 2-layer or multilayer engineered parquet
Humidity on delivery about 7%-9%
Bottom layer spruce/pine or multiply birch
Installation glued down, floating or nailed down (see data sheet)

Dimensions in mm* Length: 900-2400
Width: 150-220, 240-320
Thickness: 12-24
Usable layer 2 | 2.5 | 3 | 4 | 5.5 | 6 mm

Special custom made products on request (about 8-10 weeks delivery time after order)
Other dimensions | other surface treatments (see page 4-7) | other thickness of usable layer | change of bottom layer | other construction types
*up to 3-5% other lengths allowed

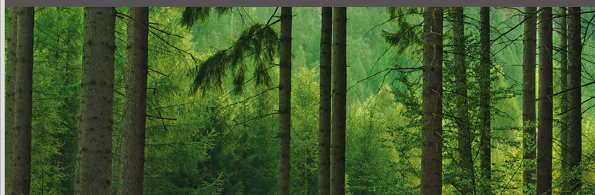

RHOMB PARQUET



Rhomb parquet is an elegant, traditional pattern that recently has a renaissance in the exclusive residential and hotel sectors. Due to the arrangement of the individual elements, it produces an interesting three dimensional cube effect. Through incidence of light in connection with the reflection of the differently arranged individual elements, the flooring has a very precious appearance.

Due to the clear geometric form language, this parquet floor generates a quiet elegance. The individual rhombs are completely provided with tongue and groove and must be firmly glued or nailed.



Muddy Creek

RHOMB PARQUET



Article: 14 135

Oak Deep Forest

Article: 14 184

Oak Volcano Valley

Article: 14 136

Oak Bayside

Article: 13 546

Oak brushed &
7pro UV-varnish


Technical data

Construction type multilayer engineered parquet
Humidity on delivery about 7%-9%
Bottom layer spruce/pine or multiply birch
Installation glued down or nailed down (see data sheet)

Dimensions in mm* Width: 120, 150
Thickness: 14-22
Usable layer 2 | 2.5 | 3 | 4 mm

Special custom made products on request (about 8-10 weeks delivery time after order)

Other dimensions | other surface treatments (see page 4-7) | other thickness of usable layer | change of bottom layer | other construction types

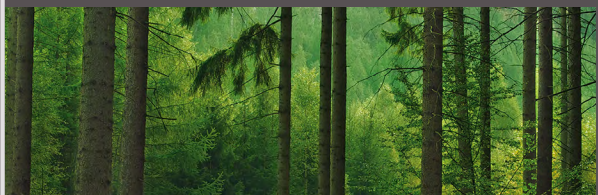

PANEL PARQUET



Article: 14 185

Pattern I: Walnut & Smoked Oak 7pro UV-varnish

With a panel parquet flooring, numerous designs and colors can be executed and accentuated. This elegant and multifaceted flooring convinces by its diversity. There are nearly unlimited possibilities in terms of design and appearance to fulfill every customer's wish. All parquet floors shown here are just examples, they are only an extract of our opportunities.

The single panels needs to be glued or nailed down (see datasheets)



Article: 14 186

P II: Oak Deep Forest




Article: 14 187

P III: Teak 7pro UV-varnish



Article: 14 188


P IV: Oak 7pro UV-varnish

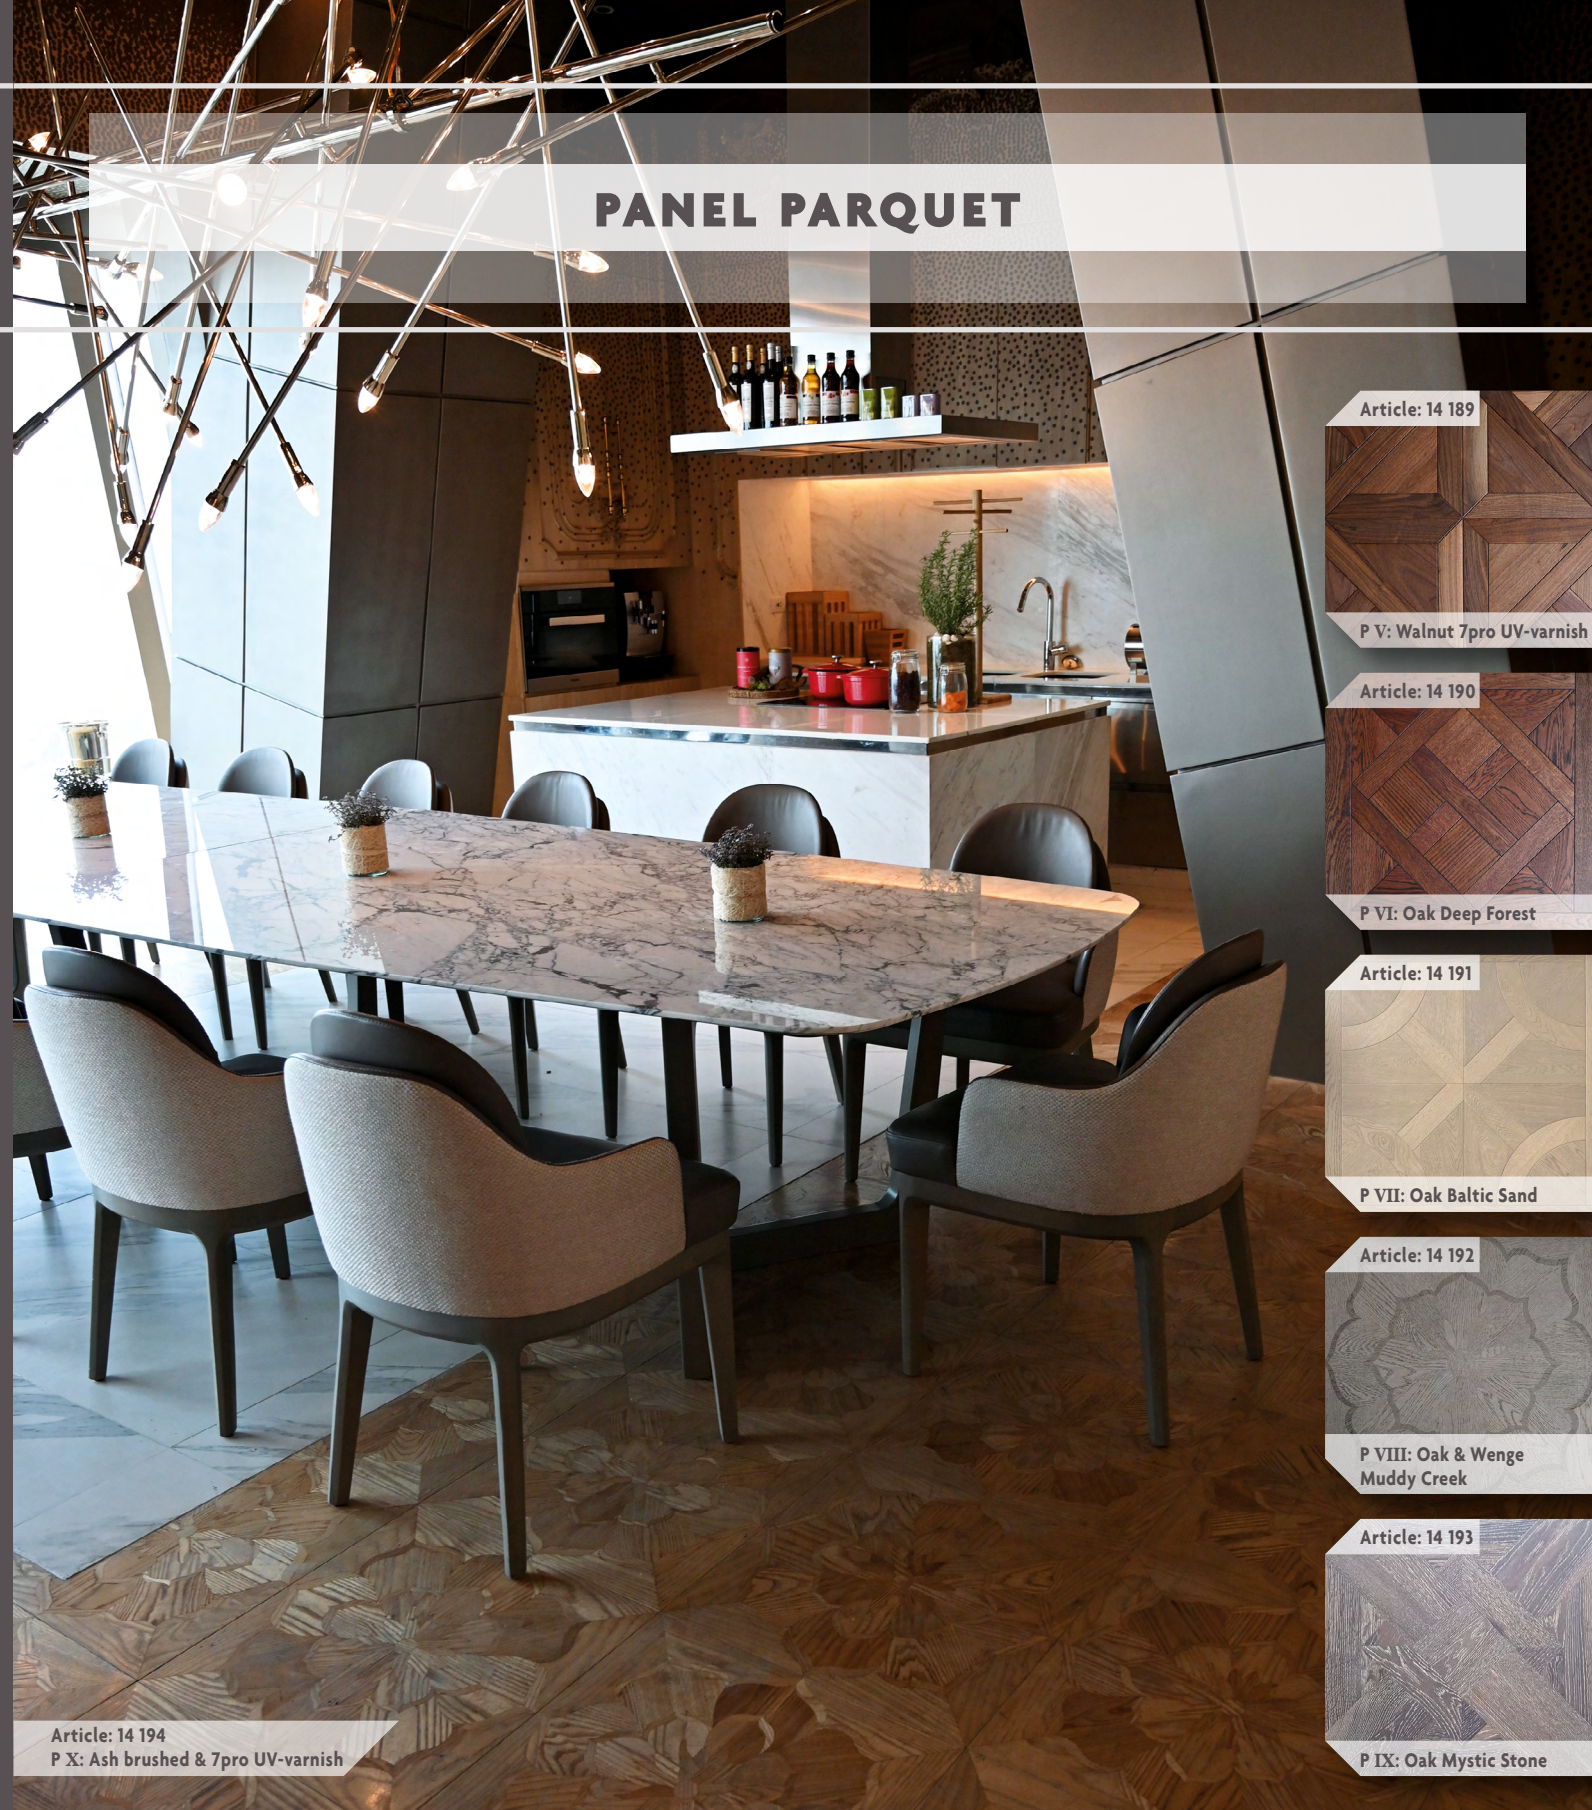

Article: 14 194


P X: Ash brushed & 7pro UV-varnish

Article: 14 189




P V: Walnut 7pro UV-varnish

Article: 14 190



P VI: Oak Deep Forest

Article: 14 191



P VII: Oak Baltic Sand

Article: 14 192



P VIII: Oak & Wenge
Muddy Creek

Article: 14 193



P IX: Oak Mystic Stone



Technical data

Construction type	multilayer engineered parquet
Humidity on delivery	about 7%-9%
Bottom layer	spruce/pine or multiply birch
Installation	glued down or nailed down (see data sheet)

Dimensions in mm*	Length: 500
	Width: 500
	Thickness: 14-22
Usable layer	2 2.5 mm

Special custom made products on request (about 8-10 weeks delivery time after order)

Other dimensions | other surface treatments (see page 4-7) | other thickness of usable layer | change of bottom layer | other construction types

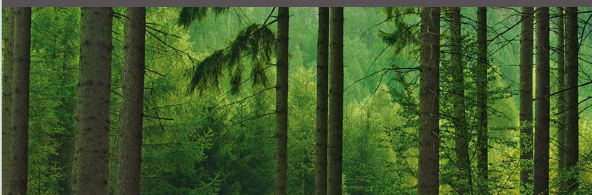

CHEVRON



This classical, very exclusive and elegant pattern, which is characterized by the typical serrated shape of a French herringbone parquet, can set exciting accents in classy and also bigger rooms. Therefore, this design is often chosen for the flooring in museums or big halls besides the usage in very noble housing or hotel projects. Thanks to our precise manufacturing process and fitting accuracy, we are able to offer this optic of a chevron parquet (French herringbone) without time-consuming cutting at the building site. The ends of the parquet tiles are cut in a 45°/60° angle (other angles on request) and are delivered with tongue and groove connection at all sides what facilitates the installation of this noble flooring.



Chevron 45°



Chevron 60°



CHEVRON

Article: 14 144

7pro UV-varnish

Article: 14 195

Smoked Oak Antique

Article: 14 196

Walnut 7pro UV-varnish

Article: 14 197

Muddy Creek

Article: 14 198

Oak brushed & 20% white
7pro UV-varnish


Technical data

Construction type multilayer engineered parquet
Humidity on delivery about 7%-9%
Bottom layer spruce/pine or multiply birch
Installation glued down, floating or nailed down (see data sheet)

Dimensions Length: 750 | 780 | 810 | 410 | 830 | 430
in mm* Width: 150 | 120 | 90 | 90 | 70 | 70
Thickness: 10-22, Winkel: 45°, 60°
Usable layer 2 | 2,5 | 3 | 4 | 5,5 | 6 mm

Special custom made products on request

(about 8-10 weeks delivery time after order)
Other dimensions | other surface treatments (see page 4-7) | other thickness of usable layer | change of bottom layer | other construction types

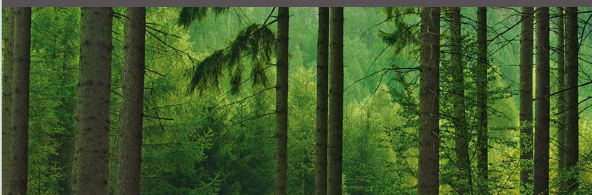

HEXAGON-CHEVRON DESIGN PARQUET HEXAGON PLAIT PATTERN 90°



Hexagon Chevron Oak Volcano Grey

The interplay of Chevron (French herringbone pieces) and hexagons provides an exciting, interwoven overall picture of the flooring. In the hexagon plait pattern 90°, the tiles are cut in a 90° angle at one end. The wood structure underlines additionally the unobtrusive vitality of this pattern.

All elements are for glue or nails down installation and provided with tongue / groove at the sides. They can be delivered in other dimensions, wood types and surface treatments on request.



Hexagon Chevron 90° Oak 7pro UV-varnish




HEXAGON CHEVRON

Article: 14 147




Oak Volcano Grey

Article: 14 201



Oak 7pro UV-varnish

Artikel: 14 199



Oak Mountain View

Technical data

Construction type	multilayer engineered parquet	Dimensions in mm*	Width: 120 chevron 240 hexagone
Humidity on delivery	about 7%-9%		Thickness: 14-22
Bottom layer	spruce/pine or multiply birch	Usable layer	2 2.5 3 4 mm
Installation	glued down, floating or nailed down (see data sheet)		

Special custom made products on request (about 8-10 weeks delivery time after order)
Other dimensions | other surface treatments (see page 4-7) | other thickness of usable layer | change of bottom layer | other construction types

Werner Floors®

Hamburg



download pdf brochure

Durafloor Werner GmbH
Sale of Werner Floors® quality parquet
with big warehouse in Hamburg.

Werner Green Industry Co. Ltd.
production of Werner Floors® quality parquet.

Fördermitglied im



ZVPF



Emissionsgeprüfter Bodenbelag
nach DIBt-Grundsätzen



The mark of
responsible forestry
Look for FSC® certified products

Our parquet flooring is produced according to DIN EN ISO 9001:2008.
The wood parquet complies with the CE-norm and can be produced FSC® certified on request.



www.durafloor-werner.de